

2026



Garage Equipment Center

مركز معدات خدمة السيارات

حلول معدات الإطارات





حلول مراكز الغسيل



حلول معدات النظافة



حلول معدات الإطارات



حلول معدات الميكانيكا



حلول معدات الزيوت والشحوم



حلول مراكز شحن الفريون



حلول مراكز الكهرباء





حلول الهواء المضغوط



Tire Changer Series

Line Draw

إبعاد المنتج



Highlights

المميزات

- Ergonomically machine body height.
- The horizontal swing arm is strengthened.
- Lock handle is strengthened.
- Modified bead breaking arm, breaking force increased by 30%.
- Strengthened machine body increased overall robustness.
- The silver alloy contactor on 40A switch to ensure it can bear large load, longevity.
- Optimized design of demounting head, greatly release the tire tension during demounting.

901210

ماكينة فك و تركيب أوتوماتيك Automatic Tire Changer 897V



Technical details

المواصفات الفنية


					
6,5 rpm	8 - 10 bar	3" - 14"	12" - 30"	1100 MM	10" - 18"



Tire Changer Series

Line Draw

إبعاد المنتج

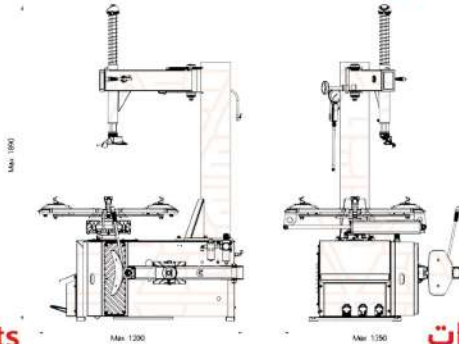

Highlights

المميزات

- Ergonomically machine body height.
- The horizontal swing arm is strengthened.
- Lock handle is strengthened.
- Modified bead breaking arm, breaking force increased by 30%.
- Strengthened machine body increased overall robustness.
- The silver alloy contactor on 40A switch to ensure it can bear large load, longevity.
- Optimized design of demounting head, greatly release the tire tension during demounting.

90123

ماكينة فك و تركيب أوتوماتيك Automatic Tire Changer LC887N



Technical details

المواصفات الفنية

					
6,5 rpm	8 - 10 bar	3" - 14"	13" - 26"	1100 MM	11" - 24"




BRIGHT



Tire Changer Series

Line Draw

ابعاد المنتج

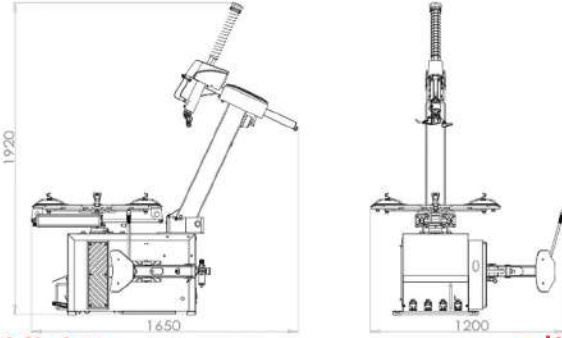

Highlights

المميزات

- Ergonomically machine body height.
- The horizontal swing arm is strengthened.
- Lock handle is strengthened.
- Modified bead breaking arm, breaking force increased by 30%.
- Strengthened machine body increased overall robustness.
- The silver alloy contactor on 40A switch to ensure it can bear large load, longevity.
- Optimized design of demounting head, greatly release the tire tension during demounting.

901217

ماكينة فك و تركيب فول أوتوماتيك Full Automatic Tire Changer LC885C



Technical details

المواصفات الفنية

6,5 rpm	8 - 10 bar	3" - 12"	12" - 24"	960 MM	10" - 22"




BRIGHT



Tire Changer Series

Line Draw

ابعاد المنتج

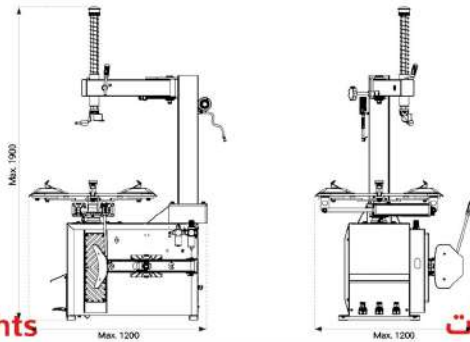

Highlights

المميزات

- Ergonomically machine body height.
- The horizontal swing arm is strengthened.
- Lock handle is strengthened.
- Modified bead breaking arm, breaking force increased by 30%.
- Strengthened machine body increased overall robustness.
- The silver alloy contactor on 40A switch to ensure it can bear large load, longevity.
- Optimized design of demounting head, greatly release the tire tension during demounting.

901216

ماكينة فك و تركيب برايت نصف أوتوماتيك Semi Automatic Tire Changer LC810-BP



Technical details

المواصفات الفنية

6,5 rpm	8 - 10 bar	3" - 12"	12" - 23"	960 MM	10" - 20"




BRIGHT

Tire Changer Series

Line Draw

ابعاد المنتج

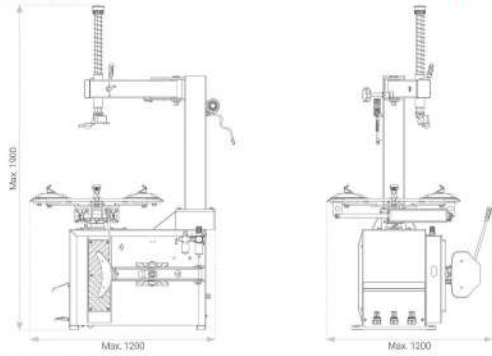

Highlights

المميزات

- Ergonomically machine body height.
- The horizontal swing arm is strengthened.
- Lock handle is strengthened.
- Modified bead breaking arm, breaking force increased by 30%.
- Strengthened machine body increased overall robustness.
- The silver alloy contactor on 40A switch to ensure it can bear large load, longevity.
- Optimized design of demounting head, greatly release the tire tension during demounting.

ماكينة فك و تركيب نصف أوماتيك Semi Automatic Tire Changer LC870N



Technical details

المواصفات الفنية

6,5 rpm	8 - 10 bar	3" - 14"	12" - 25"	1010" MM	10" - 22"

90122




GEC

Tire Changer Series

Line Draw

ابعاد المنتج

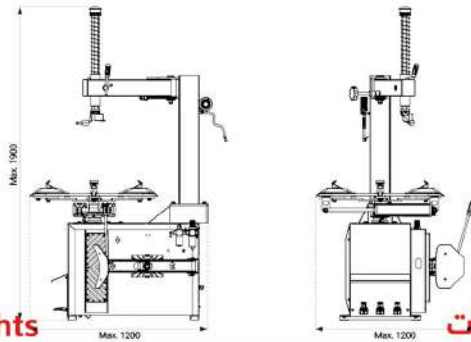

Highlights

المميزات

- Ergonomically machine body height.
- The horizontal swing arm is strengthened.
- Lock handle is strengthened.
- Modified bead breaking arm, breaking force increased by 30%.
- Strengthened machine body increased overall robustness.
- The silver alloy contactor on 40A switch to ensure it can bear large load, longevity.
- Optimized design of demounting head, greatly release the tire tension during demounting.

ماكينة فك و تركيب برايت نصف أوماتيك Semi Automatic Tire Changer GEC.TC MK7



Technical details

المواصفات الفنية

6,5 rpm	8 - 10 bar	3" - 12"	12" - 24"	960 MM	10" - 18"

90113




BRIGHT



Wheel Balancer Series

Line Draw

إبعاد المنتج

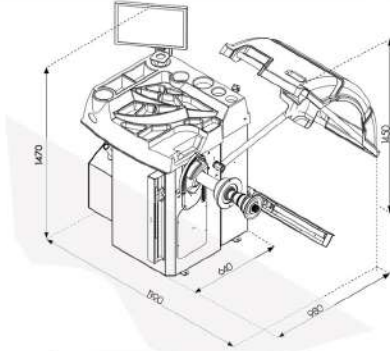

Highlights

Italian Software

المميزات

- CB 75P: Bright international brand triple layering machine, HAWEKA, German-made external accessories, SIEMENS, all internal components are German-made and Italian software.
- BT-X-100000 with a laser feature for higher accuracy.
- Equipped with a computer screen for stacking with highly advanced technology.
- LED light for easy operations

أوماتيك شاشة لمس كمبيوتر ثلاثي الأبعاد

Automatic With Touch Screen 3D

CB78P



Technical details

المواصفات الفنية



140rpm



70 kg



1,5" - 20"



1" - 28"



1118 MM



7 sec

50219




BRIGHT



Wheel Balancer Series

Line Draw

إبعاد المنتج



Highlights

Italian Software

المميزات

- The machine has an easy-to-use Italian program.
- Automatic calculation of diameter and distance.
- The machine has 5 ALU balancing programs and 2 intelligent ALU balancing programs.
- The machine is equipped with a 19-inch LCD screen.
- The device will enter standby mode when not in use for a certain period.
- Weight position position at six o'clock, with laser signal line, fast and comfortable.

أوماتيك بشاشة كمبيوتر بالسونار

Automatic With Sonar Gauge

CB75-S



Technical details

المواصفات الفنية



140rpm



70 kg



1,5" - 20"



1" - 28"



1118 MM




7 sec

50211

**BRIGHT****Wheel Balancer Series**

Line Draw

ابعاد المنتج

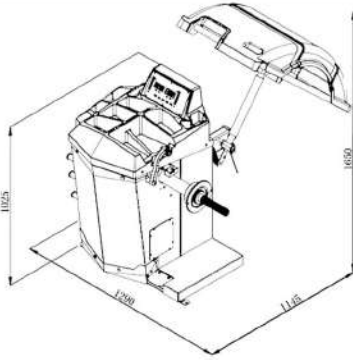**Highlights****المميزات**

- The balancer has independent intellectual property rights. The balancer has DYN/STA and different ALU balancing programs, this balancer also has motorcycle balancing program.
- The machine allows user to customize settings.
- The calibration is easy to proceed, the machine can quickly get back its precision.
- The balancing shaft is suitable for wider wheels.

50218

أوماتيك بسوفت وير ايطالي

Automatic With Italian Software

CB3021



تمتلك الماكينة
القدرة على الكلام

Technical details**المواصفات الفنية**

200 rpm



70 kg



1,5" - 20"



1" - 28"



1110 MM




7 sec

**BRIGHT****Wheel Balancer Series**

Line Draw

ابعاد المنتج

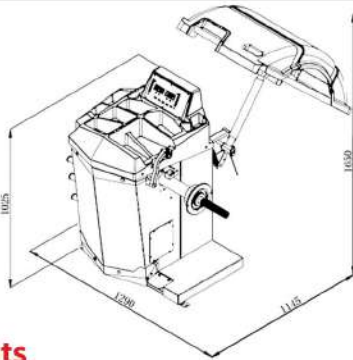**Highlights****المميزات**

- The balancer has independent intellectual property rights. The balancer has DYN/STA and different ALU balancing programs, this balancer also has motorcycle balancing program.
- The machine allows user to customize settings.
- The calibration is easy to proceed, the machine can quickly get back its precision.
- The balancing shaft is suitable for wider wheels.

50217

أوماتيك بسوفت وير ايطالي

Automatic With Italian Software

CB3010

**Technical details****المواصفات الفنية**

200 rpm



70 kg



1,5" - 20"



10" - 24"



1000 MM



10 sec




BRIGHT



Wheel Balancer Series

Line Draw

ابعاد المنتج

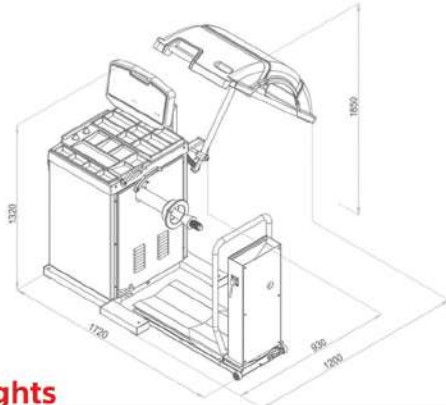

Highlights

المميزات

- The balancer has independent intellectual property rights.
- The balancer has DYN/STA and different ALU balancing programs, this balancer also has motorcycle balancing program.
- The machine allows user to customize settings, for example, switch on/off protective cover, display fine imbalance, etc.
- Customer can input distance/diameter/width by clockwise/anti-clockwise wheel rotation.
- The calibration is easy to proceed, the machine can quickly get back its precision.

50214

جهاز ترصيص ملاكي رقمي / ديجيتال Automatic Wheel Balancer CB460B



Technical details

المواصفات الفنية



200 rpm



70 kg



1,5" - 20"



1" - 28"



1110 MM



7 sec




BRIGHT



Wheel Balancer Series

Line Draw

ابعاد المنتج

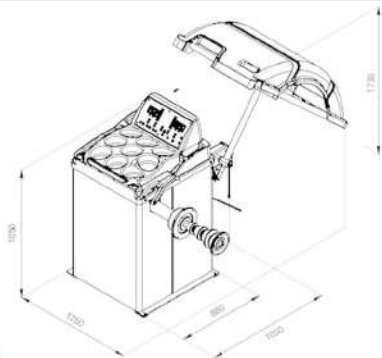

Highlights

المميزات

- The balancer has independent intellectual property rights.
- The balancer has DYN/STA and different ALU balancing programs, this balancer also has motorcycle balancing program.
- The machine allows user to customize settings, for example, switch on/off protective cover, display fine imbalance, etc.
- Customer can input distance/diameter/width by clockwise/anti-clockwise wheel rotation.
- The calibration is easy to proceed, the machine can quickly get back its precision.

50213

جهاز ترصيص ملاكي رقمي / ديجيتال Automatic Wheel Balancer CB910GBS



Technical details

المواصفات الفنية



200 rpm



65 kg



1,5" - 20"



10" - 24"



1000 MM



10 sec




BRIGHT



Wheel Balancer Series

Line Draw

أبعاد المنتج

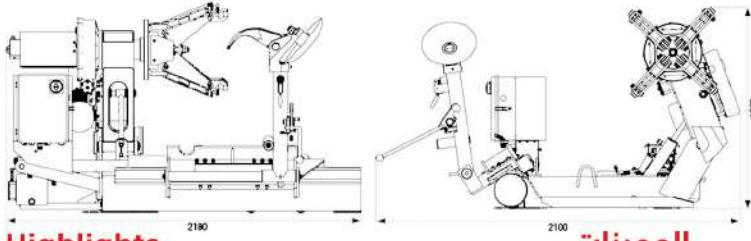

Highlights

- Adopted hydraulic control system, reliable rim clamping, move stable. Hydraulic pump station adopted imported components with good stability .
- Meet CE requirement, totally safe during operation.
- Lifting arm cylinder is center supported , bear pressure average.
- Movable operating station can be fully observed during operation to prevent danger by misoperation.
- The gearbox is made of aluminum alloy die casting, with light weight, beautiful appearance, high intensity and good sealing performance.
- The electric cabinet adopted CE level protection standard.
- Lifting arm and the base are made of strengthened and thickened metal, with high intensity.

المميزات

ماكينة فك وتركيب برايت نقل حتي
جنط 26 بوصة 3 فاز

Automatic Truck 26 Inch Rim
LC588S



Technical details

المواصفات الفنية



26"



560 kg



1000 MM



1500 MM

90128




ORLANDINI



Wheel Balancer Series

Line Draw

أبعاد المنتج

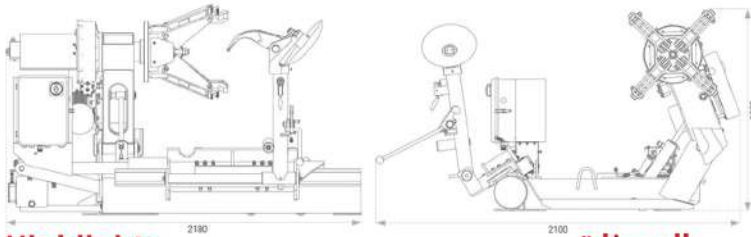

Highlights

- Hydraulic system with imported components for superior performance.
- Supports rim diameters from 14" to 46" (up to 56" with an extension).
- Powerful hydraulic pressure (130-150 bar) for efficient tire changing.
- Lightweight yet durable aluminum alloy gearbox for high-intensity performance.
- Low-noise operation (<75dB) for a better working environment.
- CE-certified for safety and reliability.

المميزات

ماكينة فك وتركيب اورلانديني
ايطالي نقل 56 بوصة 3 فاز

ORLANDINI Automatic Truck
Tire Changer 56 Inch Rim
590D



Technical details

المواصفات الفنية



46"



1100MM



891kg



2200MM

90129

GEC

HWN Series

منفاخ الإطارات بالنيروجين Nitrogen Tire Inflator



HWN-80A

يمكن تزويد
إطارات في
نفس الوقت



HWN-80S



HWN-60

Technical details

Model	HNW-80A	HNW-80S	HNW-60	موديل
Working Temperature Range	20—70°C	70—20°C	70—20°C	نطاق درجة حرارة العمل
Power Supply	220V Hz	220V Hz	220V Hz	مصدر الطاقة
Power	30 W	30 W	30 W	الطاقة
Inlet Pressure	6-10 Bar	10-6 Bar	10-6 Bar	ضغط المدخل
Nitrogen Output pressure	6- 8 Bar	8-6 Bar	8-6 Bar	ضغط إخراج النيتروجين
Nitrogen purity	99.5% : %95	99.5% : %95	99.5% : %95	نقاء النيتروجين
Nitrogen Storage Tank Capacity	80 L	80 L	60 L	سعة خزان النيتروجين

801411

801413

801412

المواصفات الفنية

GEC مسدس تزويد كاوتش Tire Inflators



804322

GEC مسدس تزويد كاوتش Tire Inflators



804330

GEC قائم تزويد كاوتش Tire Inflators



80172

GEC مسدس تزويد كاوتش Tire Inflators



8043210

GEC Tire Inflators

HWP-100



قائم تزويد كاوتش ديجيتال ملاكي و نقل Automatic Digital Tire Inflator With Stand

Features

- It supplies automatically according to the selected program.
- Equipped with a special program in case of completely empty tires.
- Equipped with a special air inlet to reduce noise.

Technical details

- Temperature Range 70 - 20°C نطاق درجة الحرارة
- Power Source 220 V مصدر الطاقة
- Power 10 W الطاقة
- Max Pressure 12 Bar أقصى ضغط
- Precision P+/- 0.07 Bar الدقة
- Pressure Unit PSI/bar/Kpa/kg/cm² وحدة الضغط

80171



Vulca Series



M10



P20



P40

Technical details

Model	M10	P10	P40	موديل
Power	600 W	250 W	1200 W	القدرة
Electricity	220 V	220 V	220 V	الكهرباء
Frequency	50Hz-60Hz	50Hz-60Hz	50Hz-60Hz	التردد
Pressure	-	10 Bar	10 Bar	ضغط الهواء
Temperature	135°C	135°C	135°C	درجة الحرارة
Net weight	7,55 kg	13 kg	29,4 kg	الوزن الصافي
Heating Unit Size	19x10 cm	ø7 cm	19x10 cm	حجم وحدة التسخين

15011

15013

15012

المواصفات الفنية



Vulca Series



GEC-NK56



GEC-MK2591



GEC-MK2887

Technical details

Model	GEC-NK 56	GEC-MK2591	GEC-2887	موديل
Power	500 W	450 W	450 W	القدرة
Electricity	220 V	220 V	220 V	الكهرباء
Frequency	50Hz-60Hz	50Hz-60Hz	50Hz-60Hz	التردد
Pressure	10 Bar	10 Bar	10 Bar	ضغط الهواء
Temperature	145°C : 165°C	155°C : 165°C	140°C : 165°C	درجة الحرارة
Heating Unit Size	10*8 cm	8 cm	8 cm	حجم وحدة التسخين

105210

15024

15022

المواصفات الفنية

مكاوي لحام كاوتش Tyres Vulcanizers

ونش ظرافة مفصلي Engine Crane



Hydraulic Series



GEC-EC1T



GEC-EC2T



GEC-EC3T

Technical details

Model	GEC-CL1T	GEC-CL2T	GEC-CL3T	موديل
Lift Capacity	1 Ton	2 Ton	3 Ton	الحمولة
Lifting Height	2450 mm	2250 mm	2000 mm	اقصى ارتفاع
Weight	75 Kg	83 Kg	136 Kg	الوزن

10035

100313

100311

المواصفات الفنية



Hydraulic Series

كوريك فتييس شمعة Hydraulic Jack Stand



GEC-HJS1



GEC-HJS1/2

Technical details

Model	GEC-HJS1	GEC-HJS2/1	موديل
Lift Capacity	1 Ton	2/1 Ton	الحمولة
Max Height	1850 mm	1900 mm	اقصى ارتفاع
Min Height	1100 mm	860 mm	اقل ارتفاع

10033

100310

المواصفات الفنية



Hydraulic Series

زرجينة سوست مساعدين Hydraulic Strut Spring Compressor **GEC-SSC1**



Technical details

Model	GEC-SSC1	موديل
Capacity	1 Ton	الحمولة
Compressing Area	21 -57 mm	مساحة الضغط
Spring Size	400 mm	طول السوستة مضغوطة

10032

المواصفات الفنية



Hydraulic Series

مكبس هيدروليكي Hydraulic Press



GEC-HP10



GEC-HP20



GEC-HP30



GEC-HP50

Technical details

المواصفات الفنية

Model	GEC-HP10	GEC-HP20	GEC-HP30	GEC-HP50	موديل
Capacity	10 Ton	20 Ton	30 Ton	50 Ton	القدرة
Working Range	330 -370mm	490-1020 mm	0-1030 mm	650-1040 mm	نطاق العمل
Stroke	150 mm	170 mm	150 mm	190 mm	الحد الأقصى للمشوار
Packing Size	75*52*15 cm	156*23*24 cm	192*78*27 cm	34*93*190 cm	حجم العبوة

170159

100319

1003105

1003106



Hydraulic Series

كوريك باكم Hydraulic Bottle jack



GEC-HBJ5



GEC-HBJ10



GEC-HBJ20



GEC-HBJ32



GEC-HBJ50

Technical details

المواصفات الفنية

Model	GEC- HBJ5	GEC- HBJ10	GEC-HBJ20	GEC-HBJ32	GEC-HBJ50	موديل
Lifting Weight	5 Ton	10 Ton	20 Ton	32 Ton	50 Ton	وزن الرفع
Min. Height	200 mm	205 mm	225 mm	285 mm	300 mm	الحد الأدنى للارتفاع
Max. Height	385 mm	390 mm	425 mm	465 mm	480 mm	الحد الأقصى للارتفاع
Packing Size	22.5*14*62 cm	22.5*14.5*64.5 cm	34*19*24.5 cm	29.5*19.5*37 cm	27*18*21 cm	الابعاد

1002124

10021117

10021114

10021121

10021122



Hydraulic Series

كواريك تمساح Hydraulic Jack



Technical details

Model	T83002	T830025	T070203	T070110	موديل
Lifting Weight	3 Ton	3 Ton	3 Ton	2.5 Ton	وزن الرفع
Min. Height	135 mm	135 mm	135 mm	75 mm	الحد الأدنى للارتفاع
Max. Height	495 mm	500 mm	495 mm	500 mm	الحد الأقصى للارتفاع
Packing Size	68*37*20 cm	68*37*20 cm	70 *39*20 cm	74 *34*15 1 cm	الابعاد

100214

10021118

100211

100217

Model	TRA3813	TR50001	TR30001	T2B20031	موديل
Lifting Weight	2 Ton	5 Ton	3 Ton	3.5Ton	وزن الرفع
Min. Height	200 mm	150 mm	140 mm	105 mm	الحد الأدنى للارتفاع
Max. Height	560 mm	600 mm	620 mm	525 mm	الحد الأقصى للارتفاع
Packing Size	48*28*20 cm	150*28*21 cm	148 *39*22cm	87*46*20 cm	الابعاد

10021119

100213

100212

10021115



• Foot Pedal



• 2 Pistons



• 2 Strong Handel

AEROPRO
ENGINEERED FOR PROFESSIONALS

AP Series

مسدس حل وربط صيني Impact Wrenches


AP7424

AP17808

AP7488

A398

AP7462

Technical details

Model	AP7488	AP7462	AP7424	AP17808	A398	موديل
Square Drive	1 Inch	4/3 Inch	2/1 Inch	2/1 Inch	2/1 Inch	محرك مربع
Speed	3600 RPM	4600 RPM	7500 RPM	7500 RPM	7800 RPM	سرعة
Torque	3100 N	1600 N	610 N	610 N	1350N	عزم الدوران
Air Hose Type	8/5 Inch	8/3 Inch	8/3 Inch	8/3 Inch	8/3 Inch	نوع خرطوم الهواء
Average Air Consumption	1140 L/min	143.9 L/min	183.9 L/min	183.9 L/min	183.9 L/min	متوسط استهلاك الهواء
Weight	16.3 kg	7 kg	2.1 kg	2.1 kg	2.4 kg	وزن
Length	58.6 cm	25.3 cm	18.5 cm	18.5 cm	19.2 cm	طول

80427

804211

804215

8042321

8042322

المواصفات الفنية

AEROPRO
ENGINEERED FOR PROFESSIONALS

AP Series

صاروخ هواء 5 لفات Air Angle Sander AP319


AEROPRO
ENGINEERED FOR PROFESSIONALS

AP Series

بافر صنفرة دائري 5 بوصة Air Sander AP7335



Technical details

Model	AP7319	موديل
Speed	1000 rpm	سرعة
Air Hose Type	8/3 Inch	نوع خرطوم الهواء
Avr. Air Consump.	141.7 L/min	متوسط استهلاك الهواء
Weight	1.92 Kg	وزن

1303311

المواصفات الفنية

Technical details

Model	AP7335	موديل
Reduce	5 Inchs	القطر
Speed	1000 RPM	سرعة
Air Hose Type	8/3 Inch	نوع خرطوم الهواء
Avr. Air Consump.	128.2 L/min	متوسط استهلاك الهواء
Weight	1.08 kg	وزن

130369

المواصفات الفنية

AEROPRO
ENGINEERED FOR PROFESSIONALS

AP Series
AP17813

صاروخ اسطمبات بالهواء
Air Molding Polisher



15043

16 Pieces

AEROPRO
ENGINEERED FOR PROFESSIONALS

AP Series
AP27313K

صاروخ اسطمبات بالهواء
Air Molding Polisher



11 Pieces

150410

AEROPRO
ENGINEERED FOR PROFESSIONALS

AP Series
AP7462

شنيور هواء بيد جانبية
Keyless Air Drill



1303310

AEROPRO
ENGINEERED FOR PROFESSIONALS

AP Series
AP8036

صاروخ اسطمبات بالهواء
Air Molding Polisher



4032


AEROPRO
ENGINEERED FOR PROFESSIONALS

AP Series
R8043

صاروخ اسطمبات بالهواء
Air Molding Polisher



30224

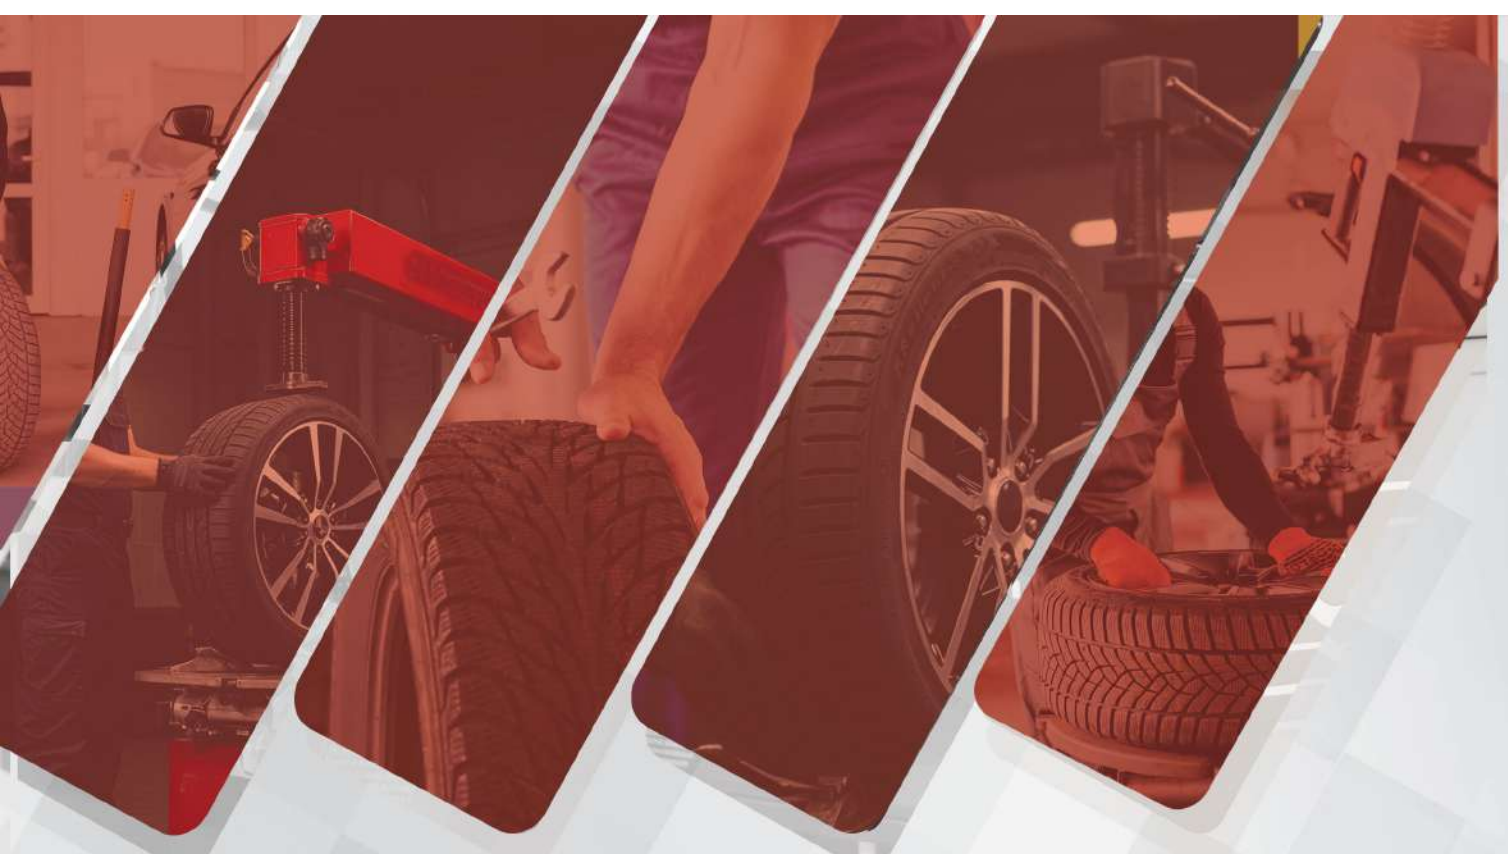

فرع الجمهورية

٥٥ شارع الجمهورية - وسط البلد ، القاهرة

تليفون : ٠٢ / ٢٥٩٣٧٢٩٦

٠٢ / ٢٧٨٧٧١١٤ :

فاكس : ٠٢ / ٢٥٩١٢٧٠٣

فرع الهرم

٦٧ شارع الهرم - المريوطية ، الجيزة

تليفون : ٠٢ / ٣٣٨٨٤٢٩٨

فاكس : ٠٢ / ٣٣٨٥٤٩١٢

فرع الدقهلية

٥٤ شارع عبدالسلام عارف - ميدان الساعة - الدقهلية

التواصل عن طريق الخط الساخن

01225 850 800   **HOTLINE**

 [youtube.com/gecegy](https://www.youtube.com/gecegy)

 [Facebook.com/GECEGY.garageequipmentcenteregypt](https://www.facebook.com/GECEGY.garageequipmentcenteregypt)

 <https://www.linkedin.com/company/gecegy>

sales@gecegy.com

customerservice@gecegy.com



www.gecegy.com

GEC